

## eHMA240

### MIXING AMPLIFIER

*Powered mixer*



### PRODUCT OVERVIEW

ECLER ESSENTIALS eHMA240 is a self-powered audio mixer including 2 MIC inputs, 2 MIC/LINE ST inputs, 2 LINE ST inputs and one AUX/REC output. Supports both low (4 Ω) and high impedance (70V, 100V) loudspeaker lines, with independent 4-ZONE ON/OFF switches (ZONE 1, ZONE 2, ZONE 3 and ZONE 4). It also includes an audio priority system (voice messages, emergencies, etc.) available in 4 inputs and embedded Chime function (compatible with 1 zone paging microphones), 2 band tone control, auto stand-by mode, MUTE port and Remote port (RJ45) for remote volume control, compatible with Ecler WPmVOL.

### KEY FEATURES

- 1 x 245W @ 4Ω
- 1 x 250W @ 70V / 100V
- 4 x ZONE ON/OFF selection switches
- 2 MIC inputs, including Talkover function (priority)
- 2 MIC / LINE inputs, including Talkover function (priority)
- 2 ST LINE input
- Embedded Chime tone
- 2-band EQ (BASS/TREBLE) for Mix Output
- Remote port for volume control (WPm series compatible)
- Auto Stand-by function
- 18VDC Phantom Power (external switch)
- MUTE port to remotely mute the unit from an external device, via dry contact closure

### APPLICATIONS

- Retail stores, restaurants and bars
- BGM & Paging solutions, with message priorities and source/volume independent selection

### ACCESSORIES AND COMPATIBLE PRODUCTS

- 2UHRMKIT (2RU Rack mount kit)
- WPm series (for Remote Volume control)





2UHRMKIT



WPmVOL

MECHANICAL DIAGRAMS

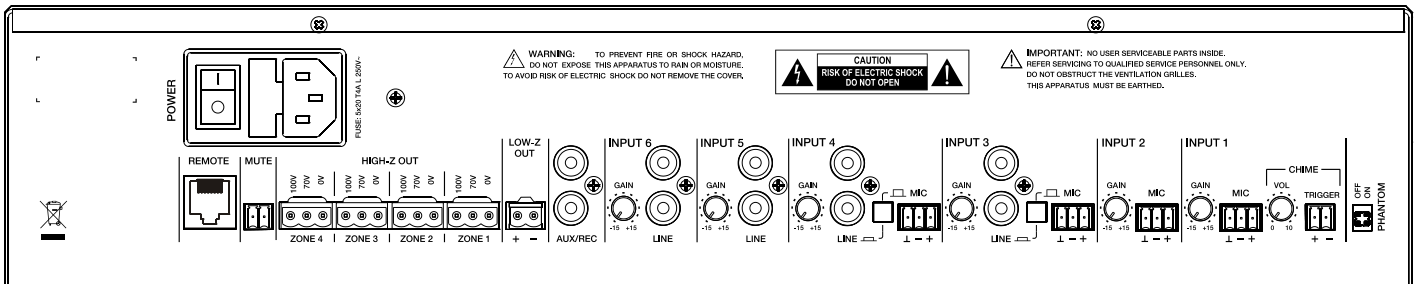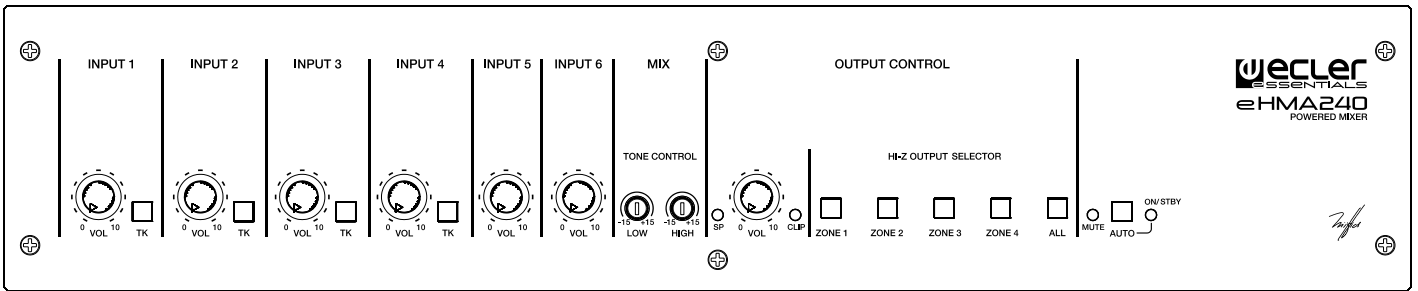

TECHNICAL DATA

<b>Power output</b>	
Low Z output	245W @ 4Ω 1% THD
100V output	250W @ 41,6Ω 1% THD
Frequency response (HPF at 70Hz)	70Hz - 25kHz (-3dB)
THD+Noise @ 1kHz Full Power, Speaker Out, Line	<0.2%
Channel crosstalk @ 1 kHz	>65dB
<b>Sensitivity / Nominal impedance</b>	
INPUT 3 - 6 LINE	-15dBV to +15dBV / >10 kΩ
INPUT 1 - 4 MIC	-20dBV to -50dBV / >1 kΩ
<b>CMRR</b>	
MIC (BAL)	>65dB @ 1kHz
<b>High Pass Filter</b>	
	70Hz
<b>Tone control (LINE &amp; MIC)</b>	
BASS	100Hz ±15dB
TREBLE	10kHz ±15dB
<b>Signal Noise Ratio (Gain at center, low Z output)</b>	
LINE	>85dB
MIC (BAL)	>75dB
<b>Talkover (Inputs 1, 2, 3 &amp; 4)</b>	
Time	2 sec.
Depth	-30dB
<b>Phantom voltage</b>	
	+18VDC
<b>Mute</b>	
Configuration	Normally open (by dry contact)
<b>Mains Voltage</b>	
	See characteristics in the back of the unit
<b>Power consumption</b>	
Pink noise, 1/8 power	49W
Pink noise, 1/3 power	105W
Standby mode (time 2 minutes)	9W
Efficiency (typical)	86%
<b>Dimensions</b>	
Panel WxDxH (knobs excluded)	435x200x88mm
Weight	5.8 kg

All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.  
 Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 information@ecler.es [www.ecler.com](http://www.ecler.com)